


ISO FC FOR 719 & 725

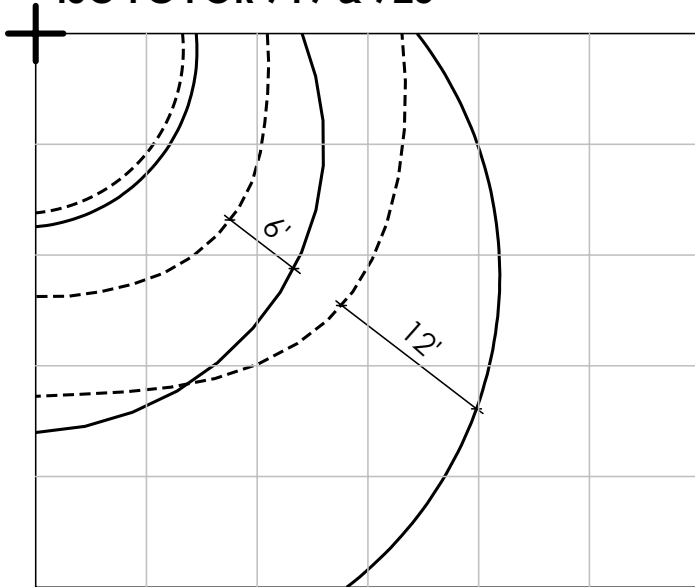

NOTES:

1. Fixture mounted at 8ft.
2. Grid is 8ft=units of mounting ht.
3. — = Footcandle level for 725.
4. - - - = Same FC level for 719, but closer in.

CARVED CYLINDER SERIES

Our new "carved cylinder" fixtures are a new take on the classic cylinder shape. What's shown below proves they are more than a "pretty face", if you will. The curved reflector is made from White Optics, a highly reflective, but matte surface. The curve helps distribute light forward and side-to-side, as shown on the graphic to the left. The ISO Footcandle distribution curves compare a simple downlight fixture - our model 719, to the 725. The solid line represents the same FC level as the dashed line closer to the wall for similar rated lumens at an 8ft mounting height. The 725 is ADA compliant, so it can be mounted lower for higher FCs and spaced further apart than a fixture like the 719.

The other unique feature is the glare reducing gradient that is silk screened onto the reflector. During the day it's a curiosity, but at night it becomes blurred as it reduces the glare at the top of the reflector. Photometrics for all three fixtures are on our website.



E-mail a question or comment.

Click on an image to go to the catalog page.



725



726



926

To view more Featured Fixtures and print high quality pdfs click [here](#).