

UPDATED 5/12

550 LED

LUMINOUS SHIELD



Design
Sustainability
Value



DESIGN: DAVID MALMAN



print this page



email this page to a colleague



installation instructions



interactive submittal drawing



application photos

COMPANIONS



FEATURES

- Simple, clean design fits many architectural styles.
- Strong uplight balanced by a spill of downlight.
- Tool-free relamping.

ECO INFO

METALS: Sand cast aluminum end caps are made from 100% recycled aluminum. Other aluminum parts have the highest available recycled content for lower embodied energy and are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO."

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

MATERIALS

- Sand cast aluminum with 100% recycled content, hand finished.
- Solid aluminum shield, hand finished.

FINISHES

SAL Satin Aluminum

MW Matte White

CCP Custom Color Painted finish

Standard metal finishes are hand satined and waxed. Other metal finishes are available. Contact factory.

LAMPING

CF: 2-CF26DTT, CF32 or 42TTT, Gx24q base.

Lamps not included.

LED: 1-GU24 base A19, 13.5, 800 lumens, 3000K and triac dimmable. Supplied with fixture.

BALLAST/DRIVER

CF: Integral electronic HPF, 120V/277V.

See "GENERAL INFO" for more detail.

LED: Electronic driver is built into the lamp, 120V only.






999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



550


PROJECT: 301 Bryant St., SF
 LTG DES: ALD/David Malman

M550

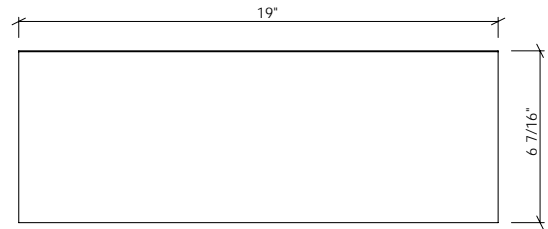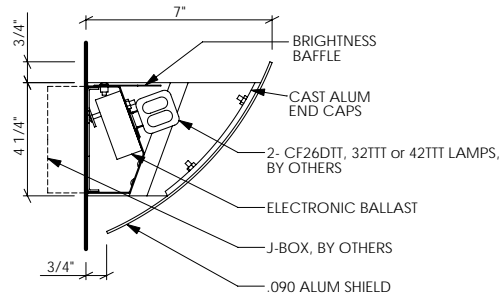

PHOTOMETRICS

Lighting Sciences Report No. 23669
 Fixture efficiencies 67.3%

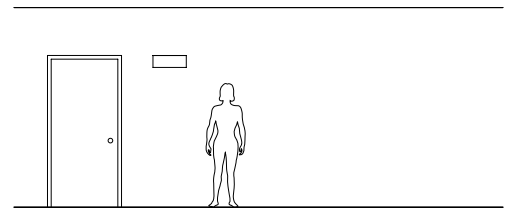

OPTIONS

DIMMING: CF: Available electronic ballast with a dimming range of 100-15%, 120 volt for 26w only. Ballast dimmable from any incandescent dimmer. Other dimming ballasts available. LED: Triac dimmable, 120V only.

NORMAL POWER FACTOR BALLAST: This fixture is available with an NPF 120 volt electronic ballast only for 26W lamp at a lower cost. Specify **120NPF**

EMERGENCY BATTERY PACK: Available with an integral EBP, specify IEM.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 4 lbs

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail
- Special lengths

SPEC GUIDE SAMPLE SPEC: 550-CF2/26-120-SAL

CAT#	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 550	<input type="checkbox"/> CF2/26	<input type="checkbox"/> 120	<input type="checkbox"/> SAL	<input type="checkbox"/> IEM
	<input type="checkbox"/> CF2/32	<input type="checkbox"/> 277	<input type="checkbox"/> MW	
	<input type="checkbox"/> CF2/42	<input type="checkbox"/> 120DIM	<input type="checkbox"/> CCP	
	<input type="checkbox"/> LED1/13.5			



Our fixtures are handcrafted here in the USA using the highest quality materials.



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com