



DESIGN: RANDY BORDEN

160-8 shown in Satin Aluminum and with hexcel louver



160-8 160-12 **LEM**

DIRECT/INDIRECT RING

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

COMPANION



FEATURES

- Direct/Indirect Lighting.
- Concentric ring geometry.
- Available in two sizes.
- Optional acrylic lamp baffle.
- Tool-free relamping.

MATERIALS

- Solid aluminum metal work, hand finished
- Aluminum hexcel louver

FINISHES

- SAL** Satin Aluminum
- MW** Matte White
- CCP** Custom Color Painted finish

Aluminum finish is hand satined and waxed.

LAMPING

160-8: 1-CF26 or 32WTTT, Gx24q base.
160-12: 2-CF26WTTT, Gx24q base.
Lamps not included.

BALLAST

Integral electronic HPF, 120V/277V.
See "GENERAL INFO" for more detail.

ECO INFO

METALS: Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"


FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.




160-12 Shown in Satin Aluminum.

160-8 160-12 **IEM**

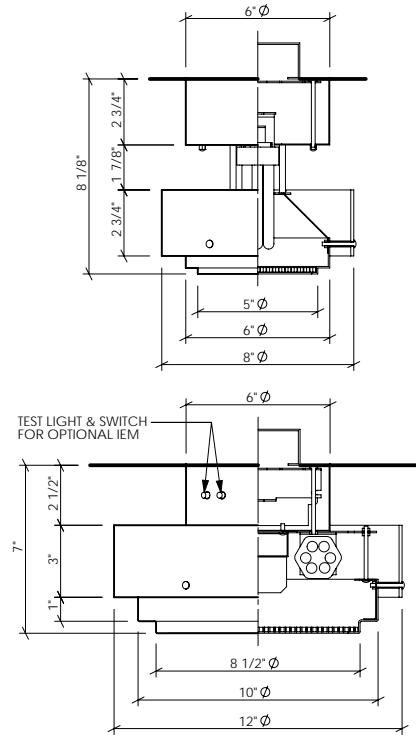

PHOTOMETRICS
Lighting Sciences Report No. 26211
Fixture Efficiency: 41.1%

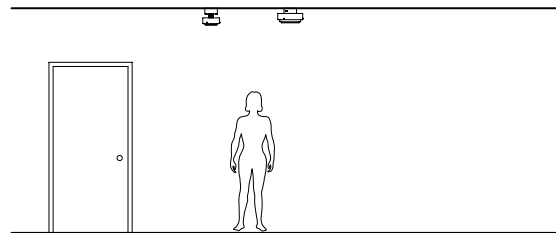

OPTIONS

ACRYLIC LENS: Available with white acrylic bottom lens, specify AL.

ACRYLIC LAMP BAFFLE: 160-8 available with frosted clear acrylic to block sightline to upper part of lamp, specify AB.

DIMMING: Available electronic ballast with a dimming range of 100-15%, 120-volt only. Ballast dimmable from any incandescent dimmer. Other dimming ballast available.

EMERGENCY BATTERY PACK: Remote mounted EPB, for 160-8, specify REM. Integral EPB available for 160-12, Specify IEM.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 160-8: 4lbs
160-12: 6lbs

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

SPEC GUIDE SAMPLE SPEC: 160-8-CF1/26-120-SAL-AL

CAT#	SIZE	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 160	<input type="checkbox"/> 8 <input type="checkbox"/> 12	<input type="checkbox"/> CF1/26 <input type="checkbox"/> CF1/32 <input type="checkbox"/> CF2/26	<input type="checkbox"/> 120 <input type="checkbox"/> 277 <input type="checkbox"/> 120DIM	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> CCP	<input type="checkbox"/> REM <input type="checkbox"/> IEM <input type="checkbox"/> AL <input type="checkbox"/> AB (160-8 only)

NOTE: Standard electronic ballast is multi-volt and multi-wattage. 160-8 will accommodate 26 or 32 watt lamps. 160-12 available only for 2-26W.

