

UPDATED 3/15

160-8 160-12 **ITEM**

DIRECT/INDIRECT RING

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

DESIGN: RANDY BORDEN



160-8 shown in Satin Aluminum and with hexcel louver



COMPANION



FEATURES

- Direct/Indirect Lighting.
- Concentric ring geometry.
- Available in two sizes.
- Optional acrylic lamp baffle.
- Tool-free relamping.

MATERIALS

- Solid aluminum metal work, hand finished
- Aluminum hexcel louver

FINISHES

- SAL** Satin Aluminum
MW Matte White
CCP Custom Color Painted finish

Aluminum finish is hand satined and waxed.

LAMPING

160-8: **CF:** 1-CF26 or 32WTTT, Gx24q base.

LED: 1-GU24 base LED A-LAMP, 12W, 1100 lumens each, 3000k, supplied.

160-12: **CF:** 2-CF26WTTT, Gx24q base.

Lamps not included.

BALLAST

CF: Integral electronic HPF, 120V/277V.

LED: Electronic driver is built into lamp, 120V only.

Dimmable to 10% with most incandescent dimmers.

ECO INFO

METALS: Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.




999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



160-12 Shown in Satin Aluminum.

160-8 160-12

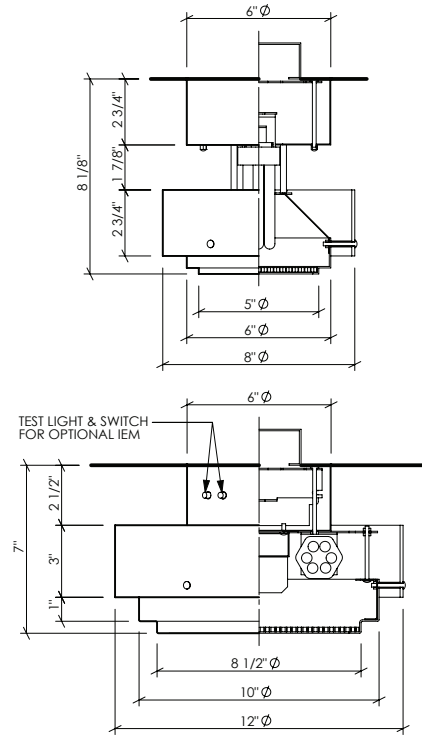

OPTIONS

ACRYLIC LENS: Available with white acrylic bottom lens, specify **AL**.

ACRYLIC LAMP BAFFLE: 160-8 available with frosted clear acrylic to block sightline to upper part of lamp, specify **AB**.

DIMMING: Available electronic ballast with a dimming range of 100-5%, 120-volt only. Ballast dimmable from any incandescent dimmer. Other dimming ballast available. Call Factory

EMERGENCY BATTERY PACK: Remote mounted EBP, for 160-8, specify **REM**. Integral EPB available for 160-12, Specify **IEM**.


MOUNTING: Standard J-box or plaster ring.

WEIGHT: 160-8: 4 lbs
160-12: 6 lbs

SPEC GUIDE SAMPLE SPEC: 160-8-CF1/26-120-SAL-AL


CAT#	SIZE	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 160	<input type="checkbox"/> 8 <input type="checkbox"/> 12	<input type="checkbox"/> CF1/26 <input type="checkbox"/> CF1/32 <input type="checkbox"/> CF2/26 <input type="checkbox"/> LED1/12(8")	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> CCP	<input type="checkbox"/> REM <input type="checkbox"/> IEM <input type="checkbox"/> AL <input type="checkbox"/> AB (160-8 only)

NOTE: Standard electronic ballast is multi-volt and multi-wattage. 160-8 will accommodate 26 or 32 watt lamps. 160-12 available only for 2-26W.



PHOTOMETRICS

Lighting Sciences Report No. 26211
Fixture Efficiency: 41.1%

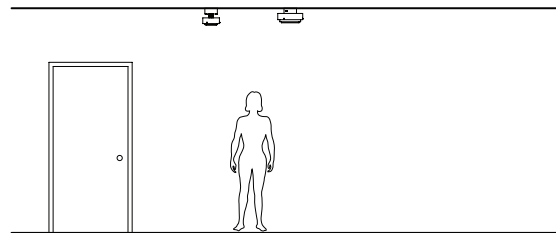

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



IBEW Labelled



Our fixtures are handcrafted here in the USA using the highest quality materials.