



720

WEDGE DOWNLIGHT
WET LOCATION

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

COMPANIONS



721



719

Shown in Natural Bronze with optional hexcel louver.



FEATURES

- Timeless, classic design.
- Solid bronze or stainless steel construction ensures long life.
- Cutoff design combined with low glare.
- One of a family of three sizes.

ECO INFO

METALS: Hood is made from bronze with 90% recycled content or for painted finishes, aluminum with 30-40% recycled content. Backplate is made from 100% recycled aluminum. All metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are hand satined. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured..

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

MATERIALS

- Solid bronze or stainless steel hood. Aluminum is used for painted finishes. Cast aluminum backplate.
- High transmission clear refractive acrylic lens.
- Aluminum hexcel louver.

FINISHES

NBZ Natural Bronze
SSS Satin Stainless Steel
SGB Semi-Gloss Black
SGW Semi-Gloss White
SGBZ Semi-Gloss Bronze
SGS Semi-Gloss Silver

CAA Clear Anodized Aluminum
CCP Custom Color Painted

*Learn more about
Natural Bronze
click here*

Standard metal finishes are hand satined. Other metal finishes are available. Contact factory.

LAMPING

1 CF13DTT, G24q base. 1-CF26W, 32W or 42WTTT 2Gx24q base. Lamps not included.

BALLAST


Integral electronic HPF, 120V/277V.
See "GENERAL INFO" for more detail.





Shown in Satin SS with standard acrylic lens.

720 WET LOCATION

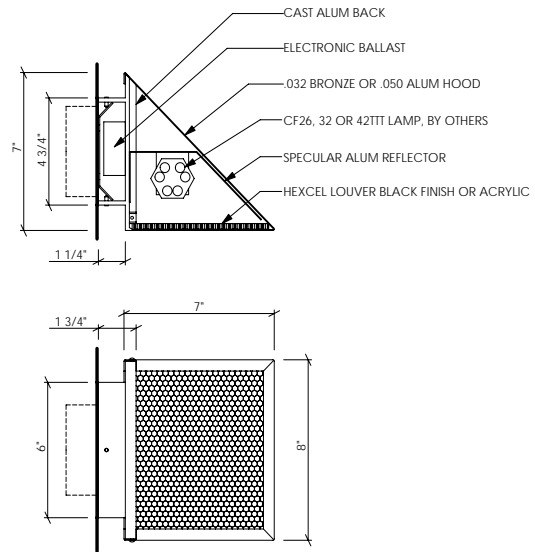


OPTIONS

LENS: High transmission clear refractive acrylic is standard. For optional hexcel louver, specify **HXL**.


NOTE: The optional hexcel open cell louver offers lower glare with higher output directly below the fixture, but less light to the sides and front.

EMERGENCY BATTERY PACK: Remote mounted EBP, specify **REM**.



PHOTOMETRICS

Lighting Sciences Report No. 23008
 Fixture Efficiency: 25.4%

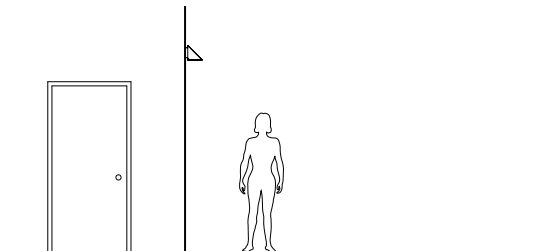

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 5lbs

NOTE: This fixture is suitable for wet or dry locations. For wet locations use only as a downlight.

VARIATIONS / MODIFICATIONS

- Special finishes
- Special sizes

NOTE: Standard electronic ballast is multi-volt and multi-wattage. Fixture will accommodate 26, 32 or 42 watt lamps. (Ballast for 13w will only operate 13w lamp.)

SPEC GUIDE SAMPLE SPEC: 720-CF1/26-120-SGB-HXL

CAT#	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 720	<input type="checkbox"/> CF1/13 <input type="checkbox"/> CF1/26 <input type="checkbox"/> CF1/32 <input type="checkbox"/> CF1/42	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> NBZ <input type="checkbox"/> SSS <input type="checkbox"/> CAA <input type="checkbox"/> SGB <input type="checkbox"/> SGW <input type="checkbox"/> SGBZ	<input type="checkbox"/> HXL

Learn more about
 Natural Bronze
[click here](#)



IBEW Labelled



Handcrafted
 and Assembled
 In California

