



Shown in Natural Bronze with hexcel louver.



731 UPDATED
FEB. 2011

QUARTER SPHERE DOWNLIGHT
WET LOCATION

IEM LED

Design
Sustainability
Value



print this page



email this page to a colleague




installation instructions



interactive submittal drawing

COMPANION



FEATURES

- Classic quarter sphere.
- Cutoff design combined with low glare.
- Electronic ballast for CF and MH lamping.
- Available with integral EBP for CF lamping.
- Available with LEDs.

MATERIALS

- Solid bronze, aluminum or stainless steel hood.
Cast aluminum backplate.
- High transmission clear refractive acrylic for CF & LED lamping.
- Aluminum hexcel louver.
- Refractive tempered glass for MH lamping.

FINISHES

- | | |
|----------------------------------|---------------------------------|
| NBZ Natural Bronze | SGS Semi-Gloss Silver |
| SSS Satin Stainless Steel | CCP Custom Color Painted |
| SGB Semi-Gloss Black | |
| SGW Semi-Gloss White | |
| SGBZ Semi-Gloss Bronze | |

*Learn more about
Natural Bronze
click here*

LAMPING

Fluorescent: 1 or 2 CF26, 32W or 42WTTT, GX24q base
Metal Halide: 1-70W or 100W medium base ED17
Lamps not included.
LED: 2-13W arrays, supplied with fixture.

BALLAST/POWER SUPPLY

CF & MH: Integral electronic HPF, 120V/277V.
See "GENERAL INFO" for more detail.
LED: Integral HPF electronic 24V driver.
120 volt only. Call factory for 277V.

ECO INFO

METALS: Hood is made from bronze with 90% recycled content, stainless steel or for painted finishes, aluminum with 30-40% recycled content. Backplate is made from 100% recycled aluminum. All metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes for the hood are hand satined. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured..


ENERGY: Designed exclusively for low energy compact fluorescent and metal halide lamps using HPF electronic ballasts.





Shown in semi-gloss silver with acrylic lens.

731 WET LOCATION

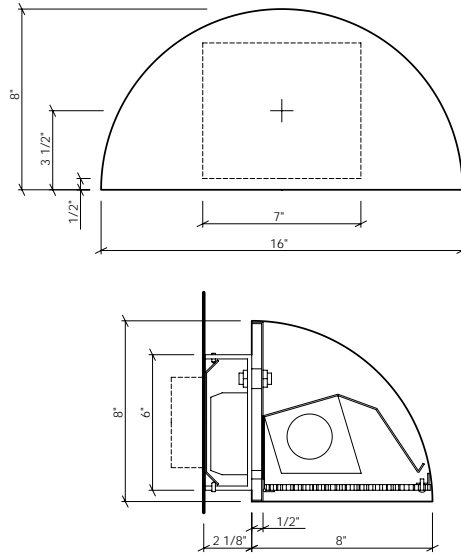

OPTIONS

LENS:

CF & LED: High transmission clear refractive acrylic or optional hexcel louver, specify **HXL**.

NOTE: The optional hexcel open cell louver offers lower glare, and higher output below the fixture, but overall less efficiency.

MH: Refractive tempered glass or optional hexcel louver with black finish **HXL**.

NOTE: The optional hexcel louver requires an open fixture rated lamp.

PHOTOCELL: For photocell specify **PH**.

EMERGENCY BATTERY PACK: Fluorescent version only, integral EBP, specify **IEM**.

NOTE: This fixture is suitable for wet or dry locations. For wet locations use only as a downlight.

LED NOTE: 2-13W arrays rated at 850 lumens each, 3000K & CRI 82. Supplied as 120V; call factory for 277.


MOUNTING: Standard J-box or plaster ring.

WEIGHT: 6lbs

SPEC GUIDE SAMPLE SPEC: 731-CF1/42-120-SGB-IEM

CAT#	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 731	<input type="checkbox"/> CF1/26	<input type="checkbox"/> 120	<input type="checkbox"/> NBZ	<input type="checkbox"/> HXL
	<input type="checkbox"/> CF2/26	<input type="checkbox"/> 277	<input type="checkbox"/> SSS	<input type="checkbox"/> PH
	<input type="checkbox"/> CF1/32		<input type="checkbox"/> SGB	<input type="checkbox"/> IEM
	<input type="checkbox"/> CF2/32		<input type="checkbox"/> SGW	
	<input type="checkbox"/> CF1/42		<input type="checkbox"/> SGBZ	
	<input type="checkbox"/> CF2/42		<input type="checkbox"/> SGS	
	<input type="checkbox"/> MH 70		<input type="checkbox"/> CCP	
	<input type="checkbox"/> MH 100			
	<input type="checkbox"/> LED/2-13			

Learn more about
Natural Bronze
[click here](#)

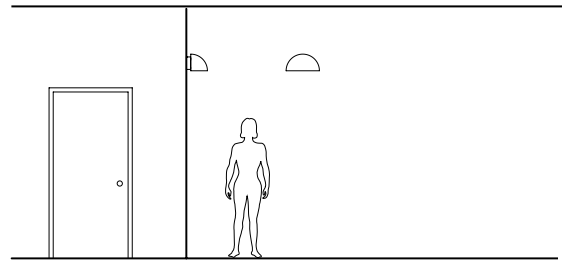

VARIATIONS / MODIFICATIONS

- Special finishes
- Special sizes

