



Shown in Natural Bronze with optional uplight feature.



**750** UPDATED  
FEB. 2011



**HOOD DOWNLIGHT**  
**WET LOCATION**

**IEM LED**

Design  
Sustainability  
Value



print this page



email this page to a colleague




installation instructions



interactive submittal drawing

COMPANIONS (Interior or damp loc.)



550



551

### FEATURES

- Clean and simple downlight.
- Available with uplight spill.
- Hood features solid bronze or stainless steel.
- Available with integral EBP.
- Available with LEDs.

### ECO INFO

**METALS:** Hood is made from bronze with 90% recycled content, stainless steel or for painted finishes, aluminum with 30-40% recycled content. Backplate is made from 100% recycled aluminum. All metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

**FINISHING:** Solid, natural metal finishes are hand satined. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured..

**ENERGY:** Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

### MATERIALS

- Solid bronze or stainless steel hood. Aluminum is used for painted finishes. Cast aluminum end caps.
- High transmission clear refractive acrylic lens.
- Aluminum hexcel louver.

### FINISHES

**NBZ** Natural Bronze

**SSS** Satin Stainless Steel

**SGB** Semi-Gloss Black

**SGW** Semi-Gloss White

**SGBZ** Semi-Gloss Bronze

**SGS** Semi-Gloss Silver

**CCP** Custom Color Paint

*Learn more about  
Natural Bronze  
click here*

### LAMPING

CF: 2-CF26W, 32W or 42WTTT 2Gx24q base.

Lamps not included.

LED: 2-13W arrays, supplied with fixture.

### BALLAST/POWER SUPPLY

CF: Integral electronic HPF, 120V/277V.

See "GENERAL INFO" for more detail.

LED: Integral HPF electronic 24V driver.



120 volt only. Call factory for 277V.





Shown in semi-gloss silver without optional uplight.

## 750 WET LOCATION

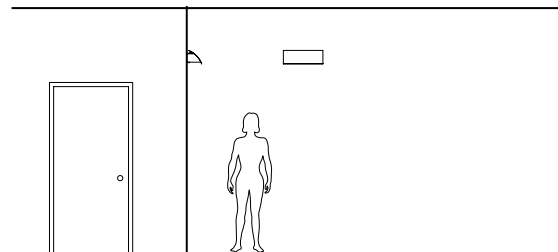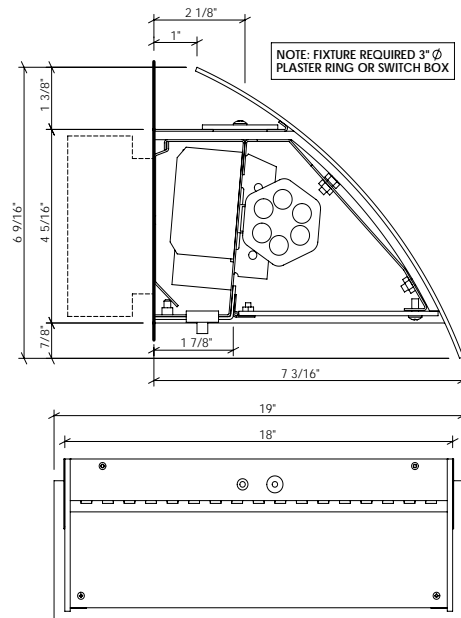

### OPTIONS

**LENS:** High transmission clear refractive acrylic is standard. For optional hexcel louver, specify **HXL**.

**NOTE:** The optional hexcel open cell louver offers lower glare with higher output below the fixture, but overall less efficiency.

**UPLIGHT:** The optional uplight feature allows a spill of uplight to make it appear the fixture floats. Specify **UPL**.

**NOTE:** This fixture is suitable for wet or dry locations. For wet locations use only as a downlight.

**LED NOTE:** 2-13W arrays rated at 850 lumens each, 3000K & CRI 82. Supplied as 120V; call factory for 277.

**MOUNTING:** Standard J-box or plaster ring.

**WEIGHT:** 5lbs

### VARIATIONS / MODIFICATIONS

- Special finishes
- Special sizes

**NOTE:** Standard electronic ballast is multi-volt and multi-wattage. Fixture will accommodate 26, 32 or 42 watt lamps.

## SPEC GUIDE SAMPLE SPEC: 750-CF2/26-120-SGB-IEM

CAT#	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 750	<input type="checkbox"/> CF2/26	<input type="checkbox"/> 120	<input type="checkbox"/> NBZ	<input type="checkbox"/> HXL
	<input type="checkbox"/> CF2/32	<input type="checkbox"/> 277	<input type="checkbox"/> SSS	<input type="checkbox"/> IEM
	<input type="checkbox"/> CF2/42		<input type="checkbox"/> SGB	<input type="checkbox"/> UPL
	<input type="checkbox"/> LED/2-13		<input type="checkbox"/> SGW	
			<input type="checkbox"/> SGBZ	
			<input type="checkbox"/> CCP	

Learn more about  
Natural Bronze  
[click here](#)

