

509 ADA LED Optional

LUMINOUS SHIELD

Design
Sustainability
Value



print this page



email this page to a colleague




installation instructions



interactive submittal drawing

DESIGN: RANDY BORDEN



FEATURES

- ADA compliant.
- Clean classic design.
- Tool-free relamping.
- Available with perforated metal overlay.

ECO INFO

METALS: Sand cast mounting back is made from 100% recycled aluminum. Other aluminum and brass parts have the highest available recycled content for lower embodied energy and are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts or LEDs.

MATERIALS

- Solid aluminum or brass metal work, hand finished.
- Luminous shield is extruded white acrylic with a matte finish.

FINISHES

SAL Satin Aluminum

SB Satin Brass

MW Matte White

CCP Custom Color Painted finish

Standard metal finishes are hand satined and waxed. Low VOC lacquer available. Other metal finishes are available. Contact factory.

LAMPING

CF: 2-CF13TT, 2Gx7 base or 2-CF26W DTT, Gx24q base. Lamps not included.

LED: 2-7W arrays, 800 lumens each, 3000K, 80 CRI, supplied with fixture.

BALLAST

CF: Integral electronic HPF, 120V/277V.



LED: Integral driver is multi-volt 120/277 and is 0-10V dimmable.





Shown with Satin Aluminum Perforated Shield


509

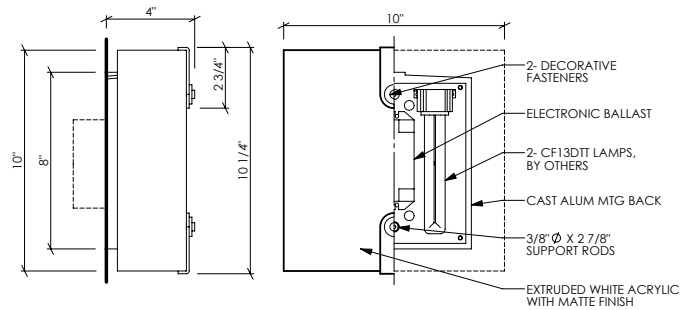

PHOTOMETRICS

Lighting Sciences Report No. 22748

Fixture efficiency 71.6%



OPTIONS

FAUX: Hand applied faux finish available. Specify **FAUX**.

PERFORATED METAL SHIELD: Available with perforated metal shield as shown above. Specify **PERF**.

DIMMING: Available 2-wire dimming 120V only. Lutron & Advance dimming also available.

EMERGENCY BATTERY PACK: Remote mounted EBP, specify **REM**. Not available for **LED**.

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail
- Custom laser cut patterned overlays

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 4lbs

SPEC GUIDE

SAMPLE SPEC: 509-CF2/13-120-SB-FAUX

CAT#	-	LAMPING	-	VOLT	-	FINISH	-	OPTION
<input type="checkbox"/> 509		<input type="checkbox"/> CF2/13		<input type="checkbox"/> 120		<input type="checkbox"/> SAL		<input type="checkbox"/> FAUX
		<input type="checkbox"/> CF2/26		<input type="checkbox"/> 277		<input type="checkbox"/> SB		<input type="checkbox"/> PERF
		<input type="checkbox"/> LED2/7				<input type="checkbox"/> MW		<input type="checkbox"/> REM
						<input type="checkbox"/> CCP		



Our fixtures are handcrafted here in the USA using the highest quality materials.



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com