







print this page
 print this page
 email this page to a colleague
 installation instructions
 interactive submittal drawing

Simple and economical vanity lighting.





ECO INFO

METALS: Aluminum parts have the highest available recycled content for lower embodied energy and are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

MATERIALS

- Solid aluminum trim, hand finished.
- Luminous shield is white polycarbonate.

FEATURES

Tool-free relamping.

FINISHES

SAL Satin AluminumMW Matte WhiteCCP Custom Color Painted finish

Standard metal finishes are hand satined and waxed. Other metal finishes are available. Contact factory.


LAMPING

CF: 2-CF26DTT Lamps not included. LED: 2-GU24 base A-lamps, 12W, 1100 lumens, 3000K, 80+ CRI. Supplied with fixture.

BALLAST


CF: Integral electronic HPF, 120V/277V. **LED:** Electronic driver is built into the lamp, 120V only, and is dimmable to 10% with most incandescent dimmers.



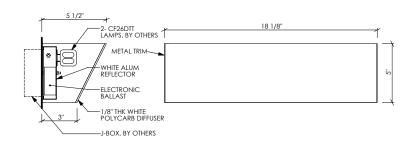

OPTIONS

EMERGENCY BATTERY PACK: Remote mounted EBP. Specify **REM**. Not available for LED.



VARIATIONS / MODIFICATIONS • Special finishes

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 3 lbs

SPEC GUIDE SAMPLE SPEC: 571-CF2/26-120-SAL





