



installation instructions



575-24 Shown in Satin Aluminum



FEATURES

- Available in 3 sizes.
- Slim profile but low glare.
- Value priced.

ECO INFO

METALS: All aluminum construction using the highest available recycled content for lower embodied energy. All metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO".

FINISHING: Paint finishes are powder coated and oven cured. Satin Aluminum is sealed with wax.

ENERGY: Designed exclusively for low energy LEDs using HPF electronic drivers.

MATERIALS

- Extruded frosted acrylic.
- Extruded aluminum mounting back.

FINISHES

SAL Satin Aluminum**MW** Matte White**MB** Matte Black


LAMPING—LED ONLY


24": 14W, 2300 lumens. 35": 21W, 3400 lumens. 46": 28W, 4600 lumens. LED arrays are 3000K, 80CRI, 90CRI and other CCTs available.


DRIVER

Integral HPF electronic driver, 120/277, 0-10V dimming. 2-wire triac dimming available for 120V.



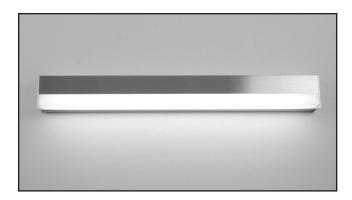

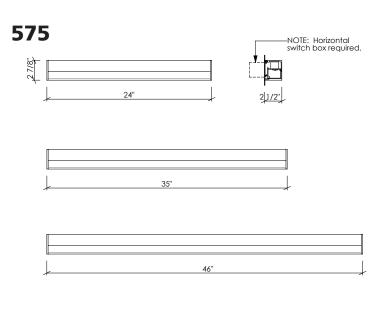

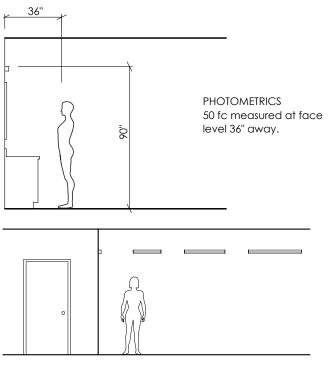

MOUNTING: Horizontal switch box only.

WEIGHT: 5 lbs

SPEC GUIDE

SAMPLE SPEC: 575-35-LED/21-SAL

CAT#	- LAMPING	- VOLT	- FINISH
D 575-24	LED/14	120	SAL
575-35	🖵 LED/21	277	I MW
D 575-46	🖵 LED/28		□ MB
			CCP

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail
- Special lengths



