

UPDATED 3/15

304-18 LED Optional

304-24 IEM LED Opt.

304-36 IEM

DRUM UP/DOWNLIGHT

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions




interactive submittal drawing



Shown in satin bronze.

COMPANIONS



FEATURES

- Strong uplight balanced by downlight
- Classic design that fits contemporary and traditional spaces.
- Solid hand-finished metal construction
- Exclusive 45-degree swivel meets California Title 24 requirements

MATERIALS

- Solid brass, bronze or aluminum metal work, hand finished.
- White acrylic bottom lens.

FINISHES

SAL Satin Aluminum

SBZ Satin Bronze

SB Satin Brass

OXBZ Oxidized Bronze

AB Antique Brass

SSS Satin Stainless Steel

CCP Custom Color Painted finish

Standard metal finishes are hand stained and either waxed or sealed with a water-based clear coat.

LAMPING

304-18: **CF:** 2-CF26, 32 or 42WTTT, GX24q base.

LED: 2-GU24 base LED A-lamps, 12W, 1100 lumens, 3000k, supplied.

304-24: **CF:** 4-CF26, 32 or 42WTTT, GX24q base.

LED: 3-GU24 base LED A-lamps as above.

304-36: **CF:** 4-CF26, 32 or 42WTTT, GX24q base.

LED: 4-GU24 base LED A-lamps as above.

BALLAST/DRIVER

CF: Integral electronic HPF, 120V/277V.

LED: Electronic driver is built into lamp, 120V only.

Dimmable to 10% with most incandescent dimmers.

ECO INFO

METALS: All metals have the highest available recycled content for lower embodied energy; all metals are valuable and recyclable at the end of the product's useful life. For more information see "SPEC GUIDE."

FINISHING: Aluminum, Antique Brass and Oxidized Bronze sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with manufacture and application of these substances. Satin Brass and Bronze are clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts or LEDs.



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



Shown in satin aluminum.

OPTIONS

DIMMING: Lutron and Advance dimming available for CF lamping.

TOP COVER: Two-piece hexcel louver available, specify **TC**.

EMERGENCY BATTERY PACK: Integral EBP, specify **IEM**. Not available for **LED**.




HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18." Standard canopy will accommodate sloped ceiling up to 20 degrees.

MOUNTING: Standard J-box or plaster ring. Safety cable provided.


304-18

304-24

304-36

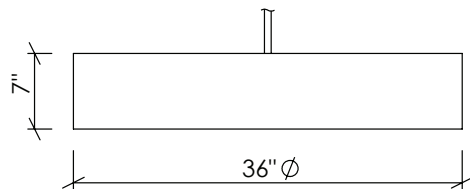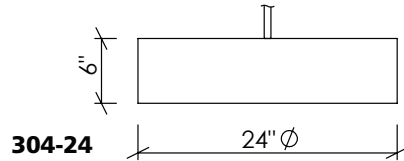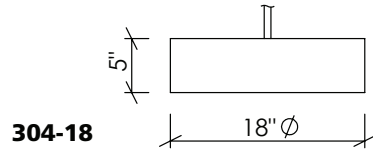

304-36

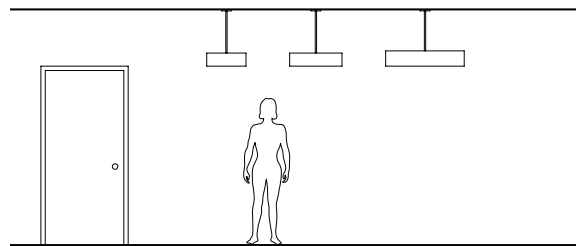

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

NOTE: Standard electronic ballast is multi-volt and multi-wattage. Fixture will accommodate 26, 32 or 42 watt lamps.

SPEC GUIDE

SAMPLE SPEC: 304-24-CF4/26-120-SAL-24" 0A

CAT#	SIZE	LAMPING	VOLT	FINISH	OPTION
<input type="checkbox"/> 304	<input type="checkbox"/> 24	<input type="checkbox"/> CF2/26	<input type="checkbox"/> 120	<input type="checkbox"/> SAL	<input type="checkbox"/> IEM
	<input type="checkbox"/> 36	<input type="checkbox"/> CF2/32	<input type="checkbox"/> 277	<input type="checkbox"/> SB	<input type="checkbox"/> TC
		<input type="checkbox"/> CF2/42		<input type="checkbox"/> AB	
		<input type="checkbox"/> CF4/26		<input type="checkbox"/> SBZ	
		<input type="checkbox"/> CF4/32		<input type="checkbox"/> OXBZ	
		<input type="checkbox"/> CF4/42		<input type="checkbox"/> SSS	
		<input type="checkbox"/> LED2/12 (18")		<input type="checkbox"/> CCP	
		<input type="checkbox"/> LED3/12 (24")			
		<input type="checkbox"/> LED4/12 (36")			



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



IBEW Labelled

**LIGHTING
FIXTURES**



Our fixtures are handcrafted here in the USA using the highest quality materials.