



Shown in satin bronze.



304-24 IEM

304-36 IEM

DRUM UP/DOWNLIGHT

Design
Sustainability
Value



print this page



email this page to a colleague




installation instructions



interactive submittal drawing

COMPANIONS



FEATURES

- Strong uplight balanced by downlight
- Classic design that fits contemporary and traditional spaces.
- Solid hand-finished metal construction
- Exclusive 45-degree swivel meets California Title 24 requirements

MATERIALS

- Solid brass, bronze or aluminum metal work, hand finished.
- White acrylic bottom lens.

FINISHES

- | | |
|--|----------------------------------|
| SAL Satin Aluminum | SBZ Satin Bronze |
| SB Satin Brass | OBJZ Oxidized Bronze |
| AB Antique Brass | SSS Satin Stainless Steel |
| CCP Custom Color Painted finish | |

Standard metal finishes are hand satined and either waxed or sealed with a water-based clear coat. Other metal finishes are available. Contact factory.

LAMPING

4-CF26W, 32W or 42WTTT Gx24q base.
Lamps not included.

BALLAST

Integral electronic HPF, 120V/277V.
See "SPEC GUIDE" for more detail.

ECO INFO

METALS: All metals have the highest available recycled content for lower embodied energy; all metals are valuable and recyclable at the end of the product's useful life. For more information see "SPEC GUIDE."

FINISHING: Aluminum, Antique Brass and Oxidized Bronze sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with manufacture and application of these substances. Satin Brass and Bronze are clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.



ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.





Shown in satin aluminum.

304-24 IEM
304-36 IEM

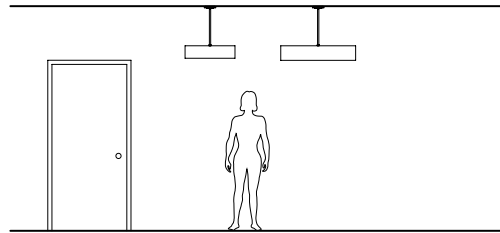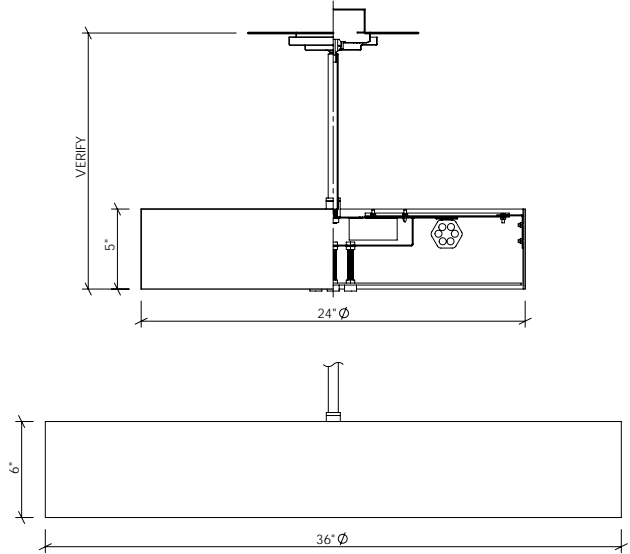

OPTIONS

DIMMING: For 2-CF26W lamplng only, available electronic ballast with a dimming range of 100-15%, 120 volt only. Ballast dimmable from any incandescent dimmer. Other dimming ballasts available.

TOP COVER: Two-piece hexcel louver available, specify TC.

EMERGENCY BATTERY PACK: Integral EBP, specify IEM.

HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18."

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

MOUNTING: Standard J-box or plaster ring. Safety cable provided.

NOTE: Standard electronic ballast is multi-volt and multi-wattage. Fixture will accommodate 26, 32 or 42 watt lamps.

SPEC GUIDE

SAMPLE SPEC: 304-24-CF4/26-120-SAL-24" OA

| CAT# | SIZE | LAMPING | VOLT | FINISH | OPTION | OA |
|------------------------------|-----------------------------|---------------------------------|---------------------------------|-------------------------------|------------------------------|----------------------------------|
| <input type="checkbox"/> 304 | <input type="checkbox"/> 24 | <input type="checkbox"/> CF4/26 | <input type="checkbox"/> 120 | <input type="checkbox"/> SAL | <input type="checkbox"/> IEM | <input type="checkbox"/> 24" STD |
| | <input type="checkbox"/> 36 | <input type="checkbox"/> CF4/32 | <input type="checkbox"/> 277 | <input type="checkbox"/> SB | <input type="checkbox"/> TC | <input type="checkbox"/> SPECIFY |
| | | <input type="checkbox"/> CF4/42 | <input type="checkbox"/> 120DIM | <input type="checkbox"/> AB | | |
| | | | | <input type="checkbox"/> SBZ | | |
| | | | | <input type="checkbox"/> OXBZ | | |
| | | | | <input type="checkbox"/> SSS | | |
| | | | | <input type="checkbox"/> CCP | | |

