


DESIGN: RANDY BORDEN



Shown in Satin Aluminum with acrylic lens



305 IEM

UP & DOWNLIGHT PENDANT

Design Sustainability Value



print this page



email this page to a colleague




installation instructions



interactive submittal drawing

COMPANION



FEATURES

- Unique shape, low profile and high efficiency.
- 3% downlight without a separate lamp.
- Allows for close-to-ceiling applications.
- Available with integral EBP.

MATERIALS

- Solid brass or aluminum metal work, hand finished.
- Aluminum hexcel louver or frosted white acrylic lens.
- Clear-jacketed silver braided SJ cord.

FINISHES

- SAL** Satin Aluminum
- SB** Satin Brass
- AB** Antique Brass
- CCP** Custom Color Painted finish

Standard metal finishes are hand satined and either waxed or sealed with a water-based clear coat. Other metal finishes are available. Contact factory.

LAMPING

4-CF26W, 32W or 42WTTT (Gx24q base) or 57WTTT (Gx24q-5 base) or 70WTTT (Gx24q-6 base)
Lamps not included.

BALLAST

Integral electronic HPF, 120V/277V.
See "GENERAL INFO" for more detail.

ECO INFO

METALS: Aluminum and brass with the highest available recycled content for lower embodied energy. Both metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Aluminum and Antique Brass finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.



ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.






Shown in Satin Aluminum

305 IEM

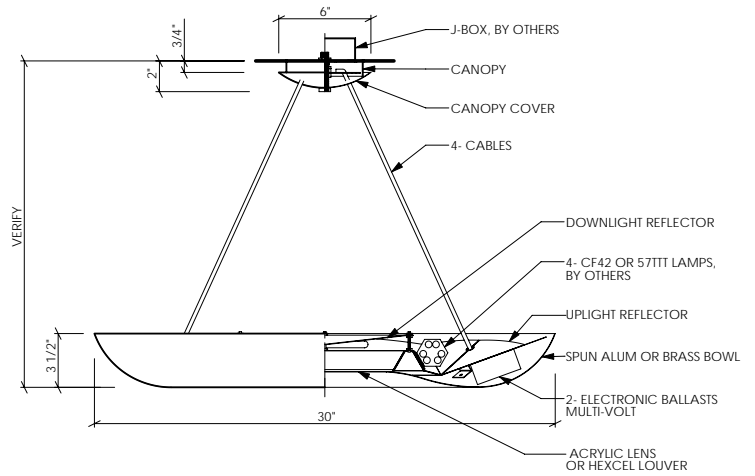

PHOTOMETRICS
Lighting Sciences Report 22635
Fixture Efficiency: 78.8%

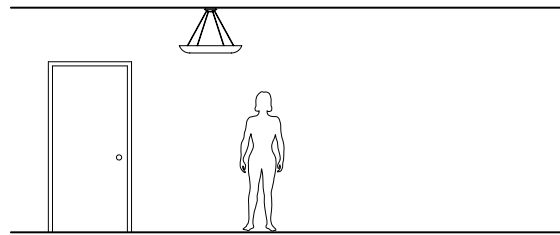

OPTIONS

DOWNLIGHT OPENING: High transmission, frosted white acrylic lens is standard. For flat hexcel louver option, specify HXL.

DIMMING: For CF26W lamping only, available electronic ballast with a dimming range of 100-15%, 120 volt only. Ballast dimmable from any incandescent dimmer. Other dimming ballasts available.

EMERGENCY BATTERY PACK: Integral EBP, specify IEM.

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 16" Call factory for sloped ceiling applications.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 15lbs

SPEC GUIDE SAMPLE SPEC: 305-CF4/26-120-SB-IEM-24" OA

CAT#	LAMPING	VOLT	FINISH	OPTION	OA
<input type="checkbox"/> 305	<input type="checkbox"/> CF4/26 <input type="checkbox"/> CF4/32 <input type="checkbox"/> CF4/42 <input type="checkbox"/> CF4/57 <input type="checkbox"/> CF4/70	<input type="checkbox"/> 120 <input type="checkbox"/> 277 <input type="checkbox"/> 120DIM	<input type="checkbox"/> SAL <input type="checkbox"/> SB <input type="checkbox"/> AB <input type="checkbox"/> CCP	<input type="checkbox"/> IEM <input type="checkbox"/> HXL <input type="checkbox"/> DIM	<input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY

