

UPDATED 9/16

**305-24 LED**

**305-36 LED**

**DRUM UP/DOWNLIGHT**

Design Sustainability Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing



COMPANIONS



FEATURES

- Classic drum design purpose-built for LED.
- Solid hand-finished metal construction.
- Available with both up & downlight LED arrays.
- Standard in two sizes - available in larger sizes.

MATERIALS

- Solid brass, bronze or aluminum metal work, hand finished.
- White acrylic bottom lens.

FINISHES

**SAL** Satin Aluminum

**SSS** Satin Stainless Steel

**SB** Satin Brass

**CCP** Custom Color Painted finish

**AB** Antique Brass

Standard metal finishes are hand stained and either waxed or sealed with a water-based clear coat.

LAMPING

305-24 & 36:

**Downlight:** 4-9w, rated at 1200lm (Total 4800lm)

4-11w, rated at 1500lm (Total 6000lm)

4-16w, rated at 2100lm (Total 8400lm)

**Uplight:** Same arrays available as uplight in addition to downlight.

All LEDs are 3000K, 80+ CRI.

DRIVER

Integral HPF electronic drivers are multi-volt 120/277V and are 0-10V dimmable.

ECO INFO

**METALS:** All metals have the highest available recycled content for lower embodied energy; all metals are valuable and recyclable at the end of the product's useful life. For more information see "SPEC GUIDE."



**FINISHING:** Aluminum, Antique Brass and Oxidized Bronze sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with manufacture and application of these substances. Satin Brass and Bronze are clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

**ENERGY:** Designed exclusively for compact fluorescent lamps using HPF electronic ballasts or LEDs.



**305** UPDATED 9/16


**DRUM UP/DOWNLIGHT**

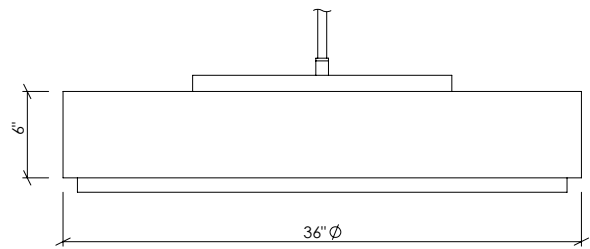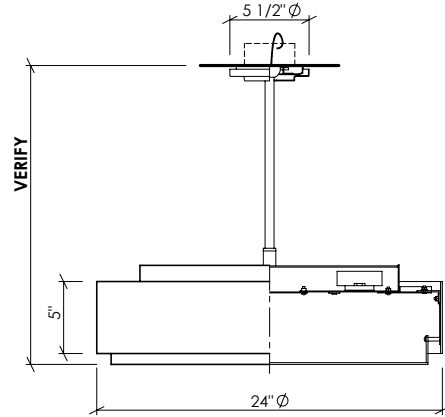

**PHOTOMETRICS**

**DOWNLIGHT:** LightLab Report No. LLi-16183-6. Tested with 4-9W, 3478 delivered lumens, 84 Lm/W. Increase light levels for 4-11W by 58%, for-16W by 75%.

**UP and DOWN:** LightLab Report No. LLi-16183-7. Tested with 4-9W and 4-9W down, 7560 delivered lumens, 82 Lm/W. For higher lumen options, see above.

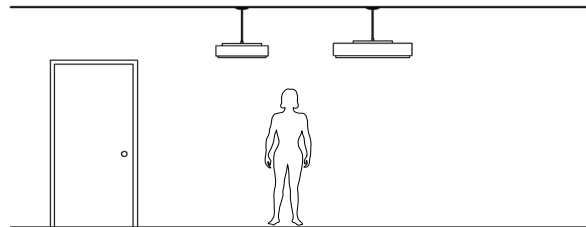

**OPTIONS**  
**TOP COVER:** Two-piece metal cover to prevent uplight, specify **TC**.  
**EMERGENCY BATTERY PACK:** Integral EBP, specify **IEM**.

**HANG HEIGHT:** Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18."

**MOUNTING:** Standard J-box or plaster ring. Safety cable provided.

**VARIATIONS / MODIFICATIONS**

- Special finishes
- Addition of decorative detail

**SPEC GUIDE**

SAMPLE SPECS: 305-36-LED4/9DN+LED4/11UP-277-SAL-24"  
 305-24-LED4/16DN-120-SB-24"-0A

CAT#	SIZE	LAMPING DN	LAMPING UP	VOLT	FINISH	OPTION	0A
<input type="checkbox"/> 305	<input type="checkbox"/> 24 <input type="checkbox"/> 36	<input type="checkbox"/> LED 4/9 DN <input type="checkbox"/> LED 4/11 DN <input type="checkbox"/> LED 4/16 DN	<input type="checkbox"/> LED 4/9 UP <input type="checkbox"/> LED 4/11 UP <input type="checkbox"/> LED 4/16 UP	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> SAL <input type="checkbox"/> SB <input type="checkbox"/> AB <input type="checkbox"/> SSS <input type="checkbox"/> CCP	<input type="checkbox"/> IEM <input type="checkbox"/> TC	<input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY



Our fixtures are handcrafted here in the USA using the highest quality materials.

