

UPDATED 9/16

305-24 LED

305-36 LED

DRUM UP/DOWNLIGHT

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing



COMPANIONS



FEATURES

- Classic drum design purpose-built for LED.
- Solid hand-finished metal construction.
- Available with both up & downlight LED arrays.
- Standard in two sizes - available in larger sizes.

MATERIALS

- Solid brass, bronze or aluminum metal work, hand finished.
- White acrylic bottom lens.

FINISHES

SAL Satin Aluminum

SSS Satin Stainless Steel

SB Satin Brass

CCP Custom Color Painted finish

AB Antique Brass

Standard metal finishes are hand stained and either waxed or sealed with a water-based clear coat.

LAMPING

305-24 & 36:

Downlight: 4-9w, rated at 1200lm (Total 4800lm)

4-11w, rated at 1500lm (Total 6000lm)

4-16w, rated at 2100lm (Total 8400lm)

Uplight: Same arrays available as uplight in addition to downlight.

All LEDs are 3000K, 80+ CRI.

DRIVER

Integral HPF electronic drivers are multi-volt 120/277V and are 0-10V dimmable.

ECO INFO

METALS: All metals have the highest available recycled content for lower embodied energy; all metals are valuable and recyclable at the end of the product's useful life. For more information see "SPEC GUIDE."

FINISHING: Aluminum, Antique Brass and Oxidized Bronze sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with manufacture and application of these substances. Satin Brass and Bronze are clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.



ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts or LEDs.



460 Roland Way • Oakland, CA 94621 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com

305 UPDATED 9/16

DRUM UP/DOWNLIGHT

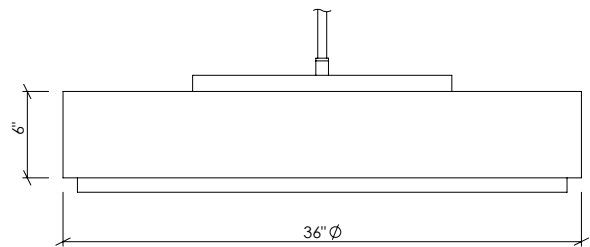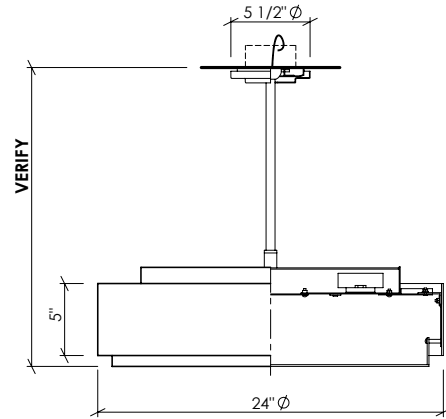

OPTIONS

TOP COVER: Two-piece metal cover to prevent uplight, specify **TC**.


EMERGENCY BATTERY PACK: Integral EBP, specify **IEM**.

HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18."

MOUNTING: Standard J-box or plaster ring. Safety cable provided.

VARIATIONS / MODIFICATIONS


- Special finishes
- Addition of decorative detail



PHOTOMETRICS

DOWNLIGHT: LightLab Report No. LLi-16183-6. Tested with 4-9W, 3478 delivered lumens, 84 Lm/W. Increase light levels for 4-11W by 58%, for 16W by 75%.

UP and DOWN: LightLab Report No. LLi-16183-7. Tested with 4-9W and 4-9W down, 7560 delivered lumens, 82 Lm/W. For higher lumen options, see above.

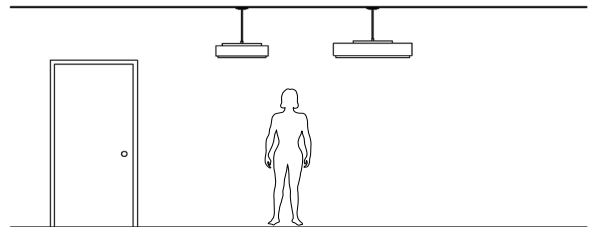

SPEC GUIDE

SAMPLE SPECS: 305-36-LED4/9DN+LED4/11UP-277-SAL-24"
305-24-LED4/16DN-120-SB-24"-0A

| CAT# | SIZE | LAMPING DN | LAMPING UP | VOLT | FINISH | OPTION | 0A |
|------------------------------|--|---|---|--|--|---|--|
| <input type="checkbox"/> 305 | <input type="checkbox"/> 24 <input type="checkbox"/> 36 | <input type="checkbox"/> LED 4/9 DN <input type="checkbox"/> LED 4/11 DN <input type="checkbox"/> LED 4/16 DN | <input type="checkbox"/> LED 4/9 UP <input type="checkbox"/> LED 4/11 UP <input type="checkbox"/> LED 4/16 UP | <input type="checkbox"/> 120 <input type="checkbox"/> 277 | <input type="checkbox"/> SAL <input type="checkbox"/> SB <input type="checkbox"/> AB <input type="checkbox"/> SSS <input type="checkbox"/> CCP | <input type="checkbox"/> IEM <input type="checkbox"/> TC | <input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY |



Our fixtures are handcrafted here in the USA using the highest quality materials.



460 Roland Way • Oakland, CA 94621 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com