



Shown in Satin Aluminum and close-to-ceiling mounting (7" OA).

**316-18**  
**316-24**  
**316-30**  
**316-36**

## SHALLOW INDIRECT BOWL

Design  
Sustainability  
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawings



application photos

### ECO INFO

**METALS:** Aluminum and brass with the highest available recycled content for lower embodied energy. Both metals are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

**FINISHING:** Aluminum and Antique Brass finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

**ENERGY:** Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

### FEATURES

- Classic shallow bowl design
- Available close-to-ceiling or with longer hang heights.
- Standard CF lamping with incandescent available
- Available in 4 diameters

### MATERIALS

- Solid brass or aluminum metal work, hand finished.

### FINISHES

**SAL** Satin Aluminum

**SB** Satin Brass

**AB** Antique Brass

**MW** Matte White

**CCP** Custom Color Painted finish

Standard metal finishes are hand satined and either waxed or sealed with a water-based clear coat. Other metal finishes are available. Contact factory.

### LAMPING

18": 2-CF13WTT, 2Gx7 base, or 2-T10 40W.

24": 2 or 4-CF26 DTT, Gx24q base or 3-75W A-19.

30": 4-CF26 or 32WTT, Gx24q base or 3-100W A-19.


36": 4-CF26,32 or 42WTT, Gx24q base or 3-150W A-19

Lamps not included.



DESIGN: GROSS WOOD

316

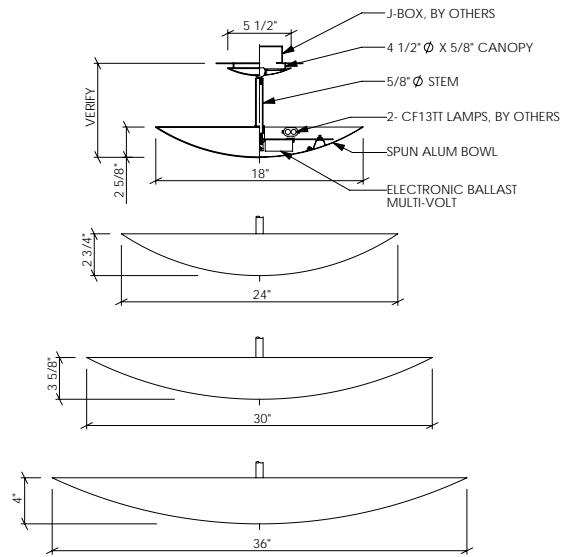

Shown in Matte White with 24" hang height

**OPTIONS**


**DIMMING:** For CF26W lamping only, available electronic ballast with a dimming range of 100-15%, 120 volt only. Ballast dimmable from any incandescent dimmer. Other dimming ballasts available.

**EMERGENCY BATTERY PACK:** Remote mounted EBP, specify REM.

**HANG HEIGHT:** Standard overall hang height is 7" or 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Standard canopy will accommodate a sloped ceiling of 40 degrees.

**MOUNTING:** Standard J-box or plaster ring. Safety cable provided

**WEIGHT:** 18" 8lbs  
24" 10lbs  
30" 12lbs  
36" 15lbs

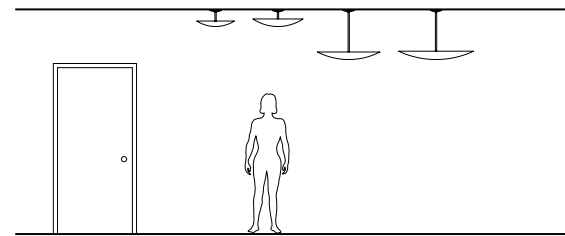

**VARIATIONS / MODIFICATIONS**

- Special finishes
- Different bowl sizes
- Addition of decorative detail

**SPEC GUIDE** SAMPLE SPEC: 316-24-CF4/26-120-SAL-DIM-7" 0A

CAT#	SIZE	LAMPING	VOLT	FINISH	OPTION	0A
<input type="checkbox"/> 316	<input type="checkbox"/> 18	<input type="checkbox"/> CF2/13	<input type="checkbox"/> 120	<input type="checkbox"/> SAL	<input type="checkbox"/> DIM	<input type="checkbox"/> 7" STD
	<input type="checkbox"/> 24	<input type="checkbox"/> INC2/40	<input type="checkbox"/> 277	<input type="checkbox"/> SB	<input type="checkbox"/> REM	<input type="checkbox"/> 24" STD
	<input type="checkbox"/> 30	<input type="checkbox"/> CF2/26	<input type="checkbox"/> 120DIM	<input type="checkbox"/> AB		<input type="checkbox"/> SPECIFY
	<input type="checkbox"/> 36	<input type="checkbox"/> CF4/26		<input type="checkbox"/> MW		
		<input type="checkbox"/> INC3/75		<input type="checkbox"/> CCP		
		<input type="checkbox"/> CF4/32				
		<input type="checkbox"/> INC3/100				
		<input type="checkbox"/> CF4/42				
		<input type="checkbox"/> INC3/150				

