


UPDATED 5/16

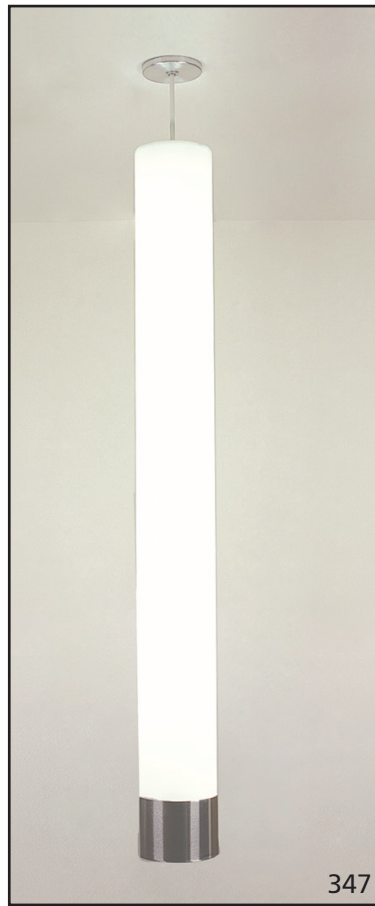

346

347

Shown in Satin Aluminum.



346 NEW LED opt 347 NEW LED opt LUMINOUS CYLINDER PENDANT

Design Sustainability Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

COMPANIONS



344



145

FEATURES

- Luminous cylinder available with or without downlight
- Available for fluorescent or LED.
- Available in a variety of sizes.

ECO INFO

ENERGY: Designed exclusively for fluorescent or LED using electronic ballasts or drivers.

METALS: Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Aluminum finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured.

MATERIALS

- White acrylic cylinder with matte finish.
- Aluminum metal work, hand finished.

FINISHES

SAL Satin Aluminum (Hand satined and waxed.)

MW Matte White

CCP Custom Color Painted finish

LAMPING

The 346 is available 25", 37" & 49" H with fluorescent or LED lamping. The 347 adds a downlight and is available for two circuit wiring. See page 2 for lamping.

Both are available in 6", 8", & 10" Ø


BALLAST/DRIVER

FL: Integral electronic HPF ballast, 120/277V. Dimming ballast available.

LED: Integral driver is 120/277 & 0-10V dimming.



460 Roland Way • Oakland, CA 94621 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com

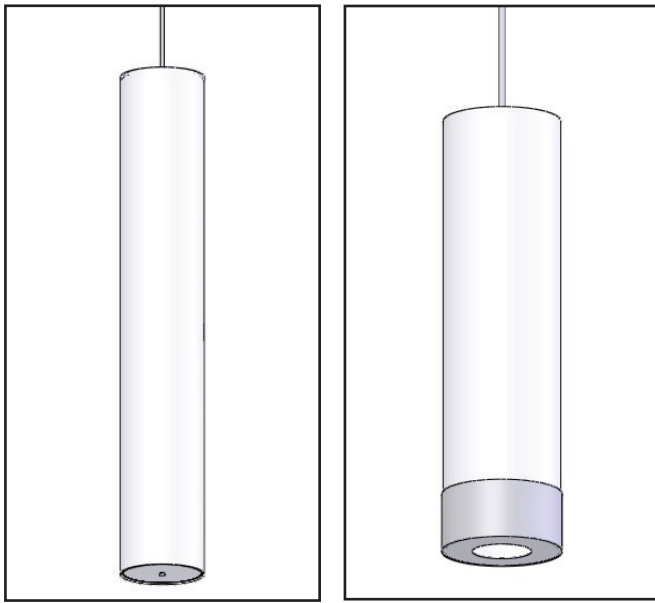

346 - 6x44

347 - 8x37

OPTIONS

STEM: Available with metal stem and swivel canopy, specify **STEM**.

Emergency Battery Pack: Integral EBP available, specify IEM, except for 25" H versions. Not available for LED.

LAMPING

MODEL	T5	T5HO	T8	LED
346-25	2T5/14 4T5/14	NOT AVAILABLE	NOT AVAILABLE	LED/31W 3900 lm or LED/41W 6400 lm
346-37	2T5/21 4T5/21	2T5/39 4T5/39	2T8/25 4T8/25	LED/47W 5900 lm or LED/62W 9600 lm
346-49	2T5/28 4T5/28	2T5/54 4T5/54	2T8/32 4T8/32	LED/62W 7800 lm or LED/82W 12,800 lm

NOTE:

- All 346 and 347 fixtures are available in 6", 8", and 10" diameters.
- T8 lamps are not available for the 6" dia versions.
- LEDs are 3000K, 80 CRI
- Model 347 adds a downlight, 120V only:
Incandescent PAR20 or 30; lamp not included.
LED PAR 20 or PAR30. LED lamp not included. The downlight is available wired as a separate circuit.


SPEC GUIDE

SAMPLE SPEC: 346-8x37-4T5/21-277-SAL-STEM-72" OA


CAT#	DIA	HT	LAMPING	VOLT	FINISH	OPTIONS	OA
<input type="checkbox"/> 346	<input type="checkbox"/> 6"	<input type="checkbox"/> 25"	<input type="checkbox"/> T5	<input type="checkbox"/> 120	<input type="checkbox"/> SAL	<input type="checkbox"/> STEM	<input type="checkbox"/> SPECIFY
<input type="checkbox"/> 347	<input type="checkbox"/> 8"	<input type="checkbox"/> 37"	<input type="checkbox"/> LED	<input type="checkbox"/> 277	<input type="checkbox"/> MW	<input type="checkbox"/> IEM	
	<input type="checkbox"/> 10"	<input type="checkbox"/> 49"	For model 347 add downlight	<input type="checkbox"/> CCP			
			<input type="checkbox"/> PAR 20 or PAR 30 (by others)				
			LED PAR 20 or PAR 30 (by others)				

346

LUMINOUS CYLINDER PENDANT

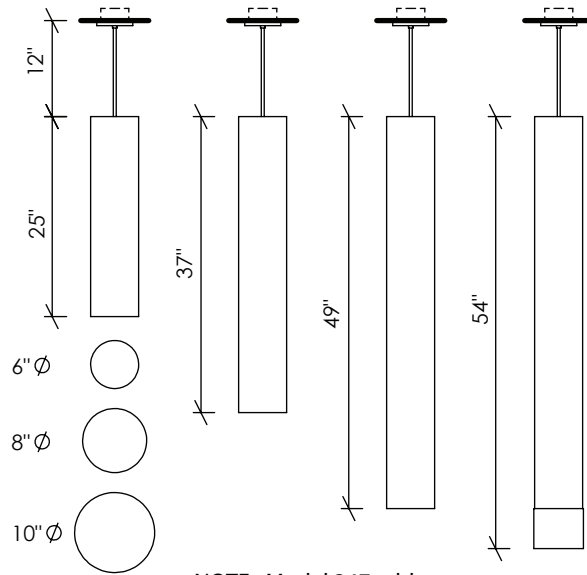


NOTE: Model 347 adds a downlight and adds 5" to the HT.



PHOTOMETRICS

Lighting Sciences Report No. L091404203
 Fixture Efficacy: 81 lm/w
 Tested with 3-6W arrays rated at 850 lm each. Adjust lumens accordingly for new arrays listed.

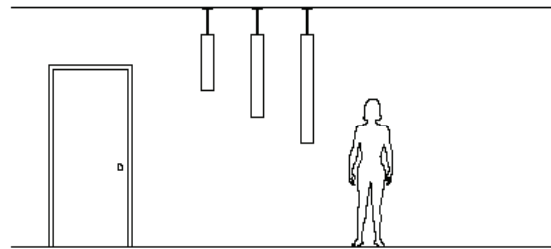

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

NOTE: Standard electronic driver is multi-volt and is 0-10V dimmable. Dimming ballast available for T5.

MOUNTING: Standard J-box or plaster ring.

WEIGHT:



460 Roland Way • Oakland, CA 94621 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



Our fixtures are handcrafted here in the USA using the highest quality materials.