


# 346 LED

## LUMINOUS CYLINDER PENDANT

Design Sustainability Value

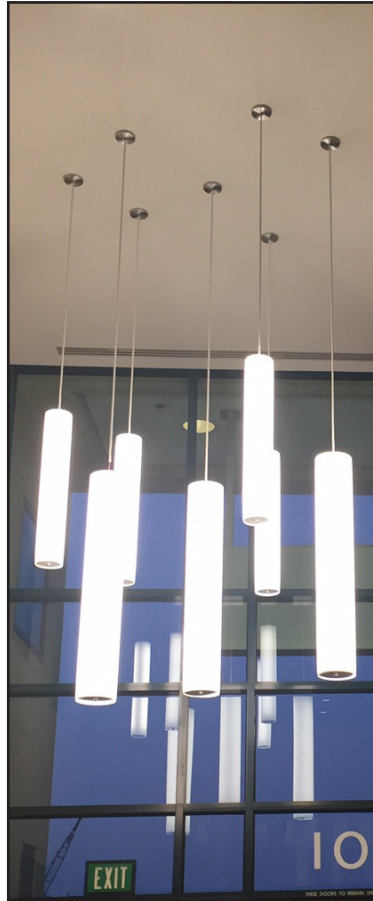

8x49 SHOWN



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

### COMPANIONS



### FEATURES

- Luminous cylinder available in multiple diameters and lengths.
- Available for fluorescent or LED.
- Driver is integral.
- Available with triac or 0-10V dimming.

### ECO INFO

**ENERGY:** Designed exclusively for fluorescent or LED using electronic ballasts or drivers.

**METALS:** Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

**FINISHING:** Aluminum finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured.

### MATERIALS

- White acrylic cylinder.
- Aluminum metal work, hand finished.

### FINISHES

**SAL** Satin Aluminum (Hand satined and waxed.)

**MW** Matte White

**CCP** Custom Color Painted finish

### LAMPING

The 346 is available 25", 37" & 49" H with fluorescent or LED lamping. See page 2 for lamping. Available in 6", 8", & 10" Ø.


### BALLAST/DRIVER

FL: Integral electronic HPF ballast, 120/277V. Dimming ballast available.

LED: Integral driver is 120/277 & 0-10V dimming.

# 346


## LUMINOUS CYLINDER PENDANT

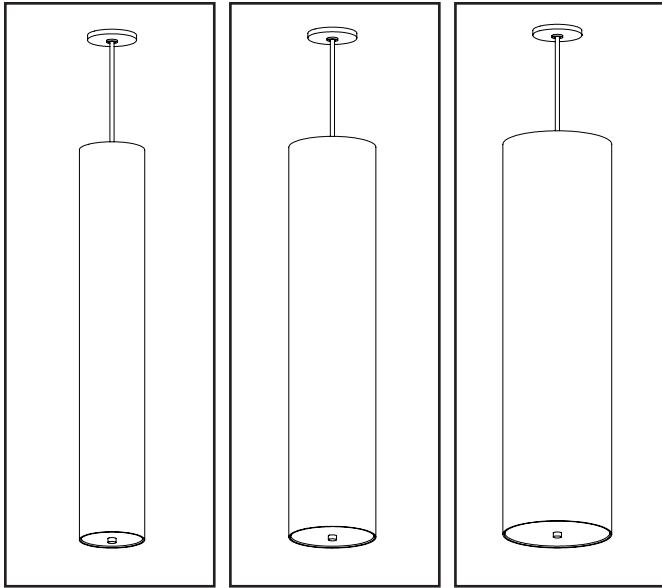

6x37

8x37

10x37

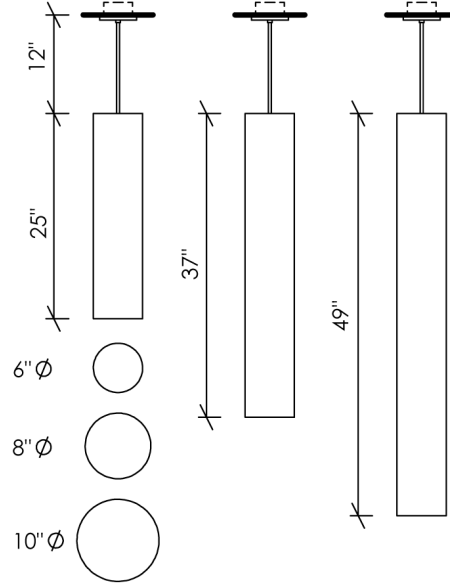

### OPTIONS

**STEM:** Available with metal stem and swivel canopy, specify **STEM**.

**Emergency Battery Pack:** Integral EBP available, specify IEM, except for 25" H versions. Not available for LED.

### LAMPING

MODEL	T5	T5HO	T8	LED
346-25	2T5/14 4T5/14	NOT AVAILABLE	NOT AVAILABLE	LED/31W 3900 lm or LED/41W 6400 lm
346-37	2T5/21 4T5/21	2T5/39 4T5/39	2T8/25 4T8/25	LED/47W 5900 lm or LED/62W 9600 lm
346-49	2T5/28 4T5/28	2T5/54 4T5/54	2T8/32 4T8/32	LED/62W 7800 lm or LED/82W 12,800 lm


### NOTE:

- T8 lamps are not available for the 6" dia versions.
- LEDs are 3000K, 80 CRI other CCT's available.



### PHOTOMETRICS

Lighting Sciences Report No. L091404203  
 Fixture Efficacy: 81 lm/w  
 Tested with 3-6W arrays rated at 850 lm each. Adjust lumens accordingly for new arrays listed based on rated lumens.

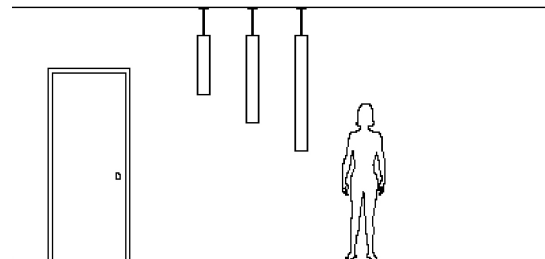

### VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

**NOTE:** Standard electronic driver is multi-volt and is 0-10V dimmable. Dimming ballast available for T5.

**MOUNTING:** Standard J-box or plaster ring.

**WEIGHT:** 5/8/12 lbs

### SPEC GUIDE

SAMPLE SPEC: 346-8x37-4T5/21-277-SAL-STEM-72" OA

CAT#	DIA	HT	LAMPING	VOLT	FINISH	OPTIONS	OA
<input type="checkbox"/> 346	<input type="checkbox"/> 6" <input type="checkbox"/> 8" <input type="checkbox"/> 10"	<input type="checkbox"/> 25" <input type="checkbox"/> 37" <input type="checkbox"/> 49"	<input type="checkbox"/> T5 <input type="checkbox"/> LED See above for lumen options.	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> CCP	<input type="checkbox"/> STEM <input type="checkbox"/> IEM	<input type="checkbox"/> SPECIFY



Our fixtures are handcrafted here in the USA using the highest quality materials.

