



355-24



355-36

## 355 LED

### LUMINOUS CYLINDER

Design  
Sustainability  
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

#### FEATURES

- Slim, elegant luminous cylinder.
- SJ cord standard; available with metal stem.
- Available in several lengths.

#### ECO INFO

**METALS:** Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the products useful life. For more information see "GENERAL INFO"

**FINISHING:** Aluminum and Antique Brass finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

**ENERGY:** Designed exclusively for compact fluorescent or LED lamps using HPF electronic ballasts/drivers.

#### MATERIALS

- Aluminum metal work, hand finished.
- White SJ cord standard. Available in black or with metal stem.
- White acrylic cylinder.

#### FINISHES

**SAL** Satin Aluminum

**MW** Matte White

**CCP** Custom Color Painted finish

Standard metal finishes are hand satined and either waxed or sealed with a water-based clear coat. Other metal finishes are available. Contact factory.

#### LAMPING

1-9W LED array, 1200lm, or

1-11W LED array, 1695lm.


Both LEDs are 3000K, 80+CRI and are easily replaceable.

#### DRIVER


Integral canopy mounted 120/277, 0-10V dimmable.



460 Roland Way • Oakland, CA 94621 • ph 510.357.0171 • fax 510.357.3832 • [www.bordenlighting.com](http://www.bordenlighting.com)

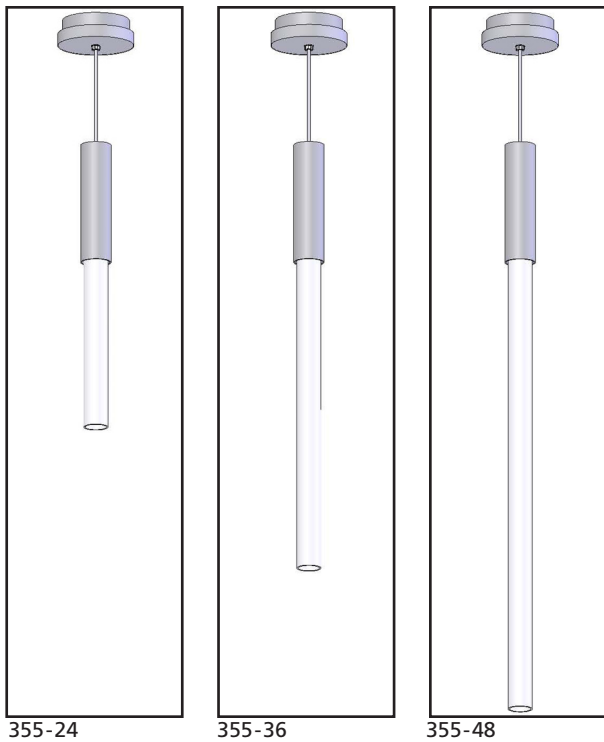

## 355 LUMINOUS CYLINDER

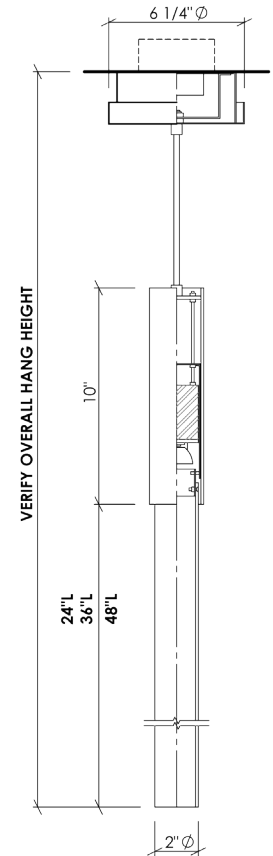


### OPTIONS

**STEM:** Available with a metal stem & swivel canopy, specify STEM.

**EMERGENCY:** Not available with integral emergency battery pack.



**PHOTOMETRICS  
COMING SOON**

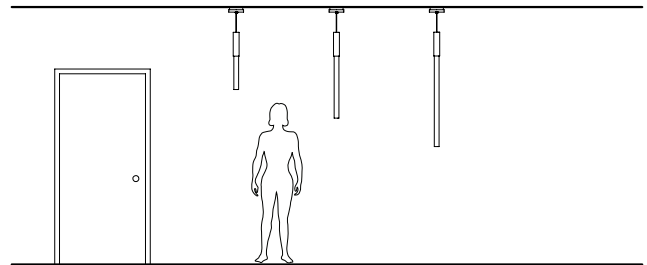

**HANG HEIGHT:** Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18"

**MOUNTING:** Standard J-box or plaster ring.

**WEIGHT:** 6 lbs

### VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail
- Variation in cylinder diameter

### SPEC GUIDE

SAMPLE SPEC: 355-36-LED/9-277-SAL-60"0A

CAT#	SIZE	LAMPING	VOLT	FINISH	OPTION	0A
<input type="checkbox"/> 355	<input type="checkbox"/> 24"	<input type="checkbox"/> LED/9	<input type="checkbox"/> 120	<input type="checkbox"/> SAL	<input type="checkbox"/> CA	<input type="checkbox"/> 24" STD
	<input type="checkbox"/> 36"	<input type="checkbox"/> LED/11	<input type="checkbox"/> 277	<input type="checkbox"/> MW	<input type="checkbox"/> STEM	<input type="checkbox"/> SPECIFY
	<input type="checkbox"/> 48"		<input type="checkbox"/> 120DIM	<input type="checkbox"/> CCP	<input type="checkbox"/> REM	



IBEW Labelled



Our fixtures are handcrafted here in the USA using the highest quality materials.



460 Roland Way • Oakland, CA 94621 • ph 510.357.0171 • fax 510.357.3832 • [www.bordenlighting.com](http://www.bordenlighting.com)