



Shown with clear baffle ring.



## 359 LED

### DOWNLIGHT PENDANT

Design  
Sustainability  
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

#### COMPANION



#### FEATURES

- Affordable long life LED
- High efficacy and high CRI
- Available with alternative baffle rings

#### ECO INFO

**METALS:** Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "SPEC GUIDE."

**FINISHING:** Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associates with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

**ENERGY:** Designed exclusively for LED's using HPF electronic drivers.

#### MATERIALS

- Aluminum metal work, hand finished.
- White SJ cord standard. Available in metal stem.

#### FINISHES

**SAL** Satin Aluminum

**MW** Matte White

**CCP** Custom Color Painted finish

Standard metal finishes are hand stained and waxed.

#### LAMPING

1-11.5W LED, 710 LUMENS, 3000K and 80 CRI.

Included with fixture.



#### DRIVER

Integral canopy mounted HPF electronic 24V driver. 120 volt only. Call factory for 277 volt.



Shown with optional frosted baffle ring.

359

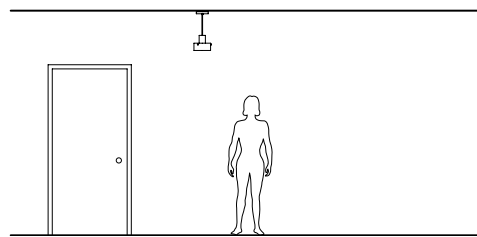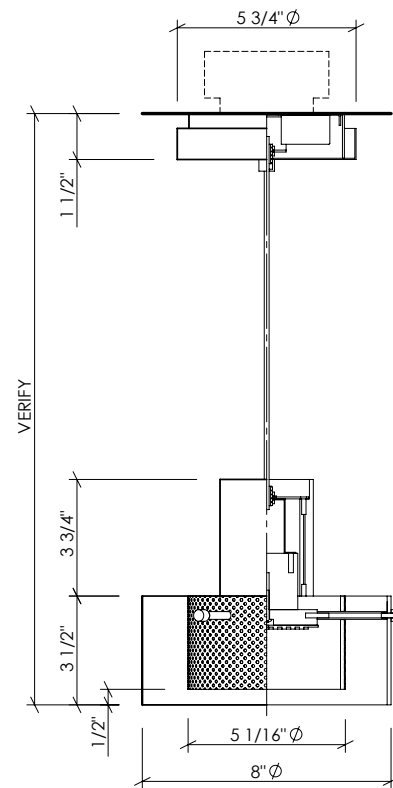

**OPTIONS**

**STEM:** Available with metal stem and swivel canopy, specify **STEM**.

**BAFFLE RING:** Standard baffle ring is clear acrylic. Optional frosted clear acrylic, specify **FCLR** or optional amber colored acrylic, specify **AMB**.

**NOTE:** Amber is a hand applied faux finish.

**HANG HEIGHT:** Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18."

**MOUNTING:** Standard J-box or plaster ring.

**WEIGHT:** 5lbs

**VARIATIONS / MODIFICATIONS**

- Special finishes
- Addition of decorative detail

**SPEC GUIDE** SAMPLE SPEC: 359-LED/11.5W-120-SAL-24" OA

CAT#	LAMPING	VOLT	FINISH	OPTION	OA
<input type="checkbox"/> 359	<input type="checkbox"/> LED/11.5W	<input type="checkbox"/> 120	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> CCP	<input type="checkbox"/> STEM <input type="checkbox"/> FCLR <input type="checkbox"/> AMB	<input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY

