

360

DIRECT/INDIRECT RING


Design
Sustainability
Value



DESIGN: RANDY BORDEN

Shown with standard hexcel louver.

COMPANION

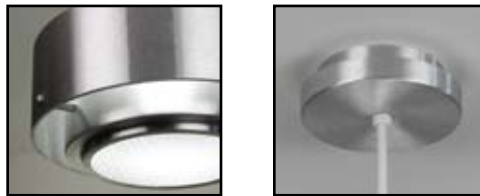

FEATURES

- Direct / Indirect Lighting.
- Concentric ring geometry.
- Tool-free relamping.

ECO INFO

METALS: Aluminum and brass with the highest available recycled content for lower embodied energy. Both metals are valuable and recyclable at the end of the products useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are sealed with a hand applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

MATERIALS

- Aluminum metal work, hand finished.
- Aluminum hexcel louver.
- White SJ cord standard. Available in black or with metal stem.

FINISHES

SAL Satin Aluminum

MW Matte White

CCP Custom Color Painted finish

Standard metal finishes are hand satined and waxed.

LAMPING

1-CF26W or 32W, Gx24q base.
Lamps not included.



BALLAST

Integral canopy-mounted electronic HPF, 120V/277V.
See "GENERAL INFO" for more detail.




Shown with optional acrylic lens

360 DIRECT/INDIRECT RING

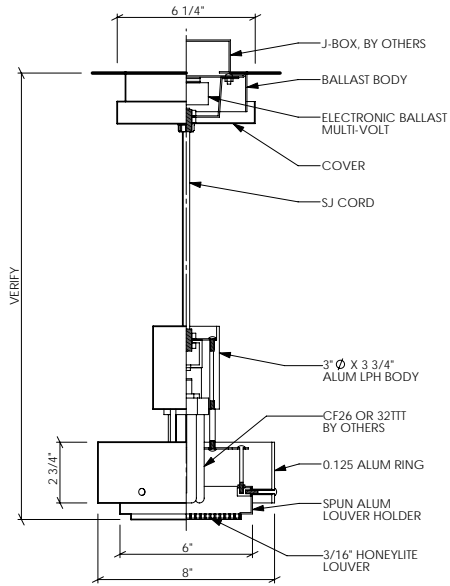

PHOTOMETRICS
Lighting Sciences Report 22543
click on Report #T22543
Fixture Efficiency: 55.7%

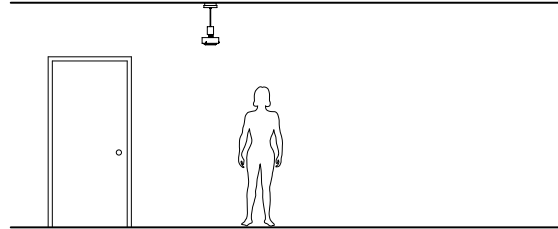

OPTIONS

DIMMING: Available with a white acrylic bottom lens, specify **AL**.

DIMMING: Our standard dimming electronic ballast has range of 100-15%, 120 volt only. Ballast dimmable from any incandescent dimmer. Other dimming ballasts available.

EMERGENCY BATTERY PACK: Remote mounted EBP, specify **REM**.

HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18"

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 6lbs

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

SPEC GUIDE SAMPLE SPEC: 360-CF1/26-120-SAL-REM-24"

CAT#	LAMPING	VOLT	FINISH	OPTION	QA
<input type="checkbox"/> 360	<input type="checkbox"/> CF1/26 <input type="checkbox"/> CF1/32	<input type="checkbox"/> 120 <input type="checkbox"/> 277 <input type="checkbox"/> 120DIM	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> CCP	<input type="checkbox"/> REM <input type="checkbox"/> AL	<input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY

NOTE: Standard electronic ballast is multi-volt and multi-wattage. Fixture will accommodate 26 or 32 watt lamps.



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com

